


## Unidapt System Counterbore (Metric)

These counterbore inserts are used in conjunction with the Unidapt Adapter or Morse Taper Sleeves. The LINK counterbore is designed to drill and counterbore in a single operation and to allow for sufficient clearance for a standard socket head cap screw.

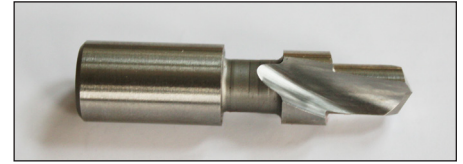

Fits Holder Size	Part No.	Metric Screw	Drill Diameter	Counterbore DIA	Drill Length	Overall Length
UA3	72-L2-510	3 mm	3.57	5.95	6.35	31.75
UA3	72-L2-511	4 mm	4.36	7.54	7.54	34.92
UA4	72-L2-512	5 mm	5.55	9.13	7.94	38.10
UA4	72-L2-513	6 mm	6.30	10.71	9.52	39.69
UA5	72-L2-514	8 mm	8.73	13.49	11.11	46.04
UA6	72-L2-515	10 mm	10.32	16.66	14.29	52.39
UA7	72-L2-516	12 mm	12.70	18.65	15.87	61.91
UA7	72-L2-517	14 mm	14.68	21.82	16.67	66.67
UA7	72-L2-518	16 mm	16.67	24.60	17.46	69.85