


## Unidapt System Spotting Drill

The Link CNC spotting drills are used with Unidapt Adapter and Morse Taper Sleeves. They feature a thin web for easy cutting and a radial flute for smooth chip removal.

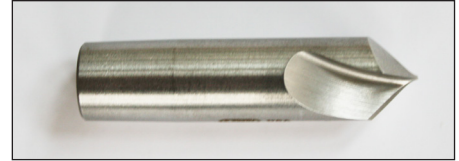

82°				
Fits Holder Size	Part No.		Drill Diameter	Overall Length
	HSS	COBALT		
UA3	63-L2-400	63-CO-430	1/4	2
UA4	63-L2-401	63-CO-401	3/8	2
UA5	63-L2-402	63-CO-402	7/16	2
UA6	63-L2-403	63-CO-403	1/2	2
UA7	63-L2-404	63-CO-404	5/8	2-1/4
UA7	63-L2-405	63-CO-405	3/4	2-1/4

90°				
Fits Holder Size	Part No.		Drill Diameter	Overall Length
	HSS	COBALT		
UA3	63-L2-431	63-CO-432	1/4	2
UA4	63-L2-420	63-CO-420	3/8	2
UA5	63-L2-421	63-CO-421	7/16	2
UA6	63-L2-422	63-CO-422	1/2	2
UA7	63-L2-423	63-CO-423	5/8	2-1/4
UA7	63-L2-424	63-CO-424	3/4	2-1/4

120°				
Fits Holder Size	Part No.		Drill Diameter	Overall Length
	HSS	COBALT		
UA3	63-L2-433	63-CO-434	1/4	2
UA4	63-L2-425	63-CO-425	3/8	2
UA5	63-L2-426	63-CO-426	7/16	2
UA6	63-L2-427	63-CO-427	1/2	2
UA7	63-L2-428	63-CO-428	5/8	2-1/4
UA7	63-L2-429	63-CO-429	3/4	2-1/4